

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
24 July 2003 (24.07.2003)

PCT

(10) International Publication Number
WO 03/061124 A2

(51) International Patent Classification⁷: **H03K 3/00**

(21) International Application Number: **PCT/IB02/05344**

(22) International Filing Date:
12 December 2002 (12.12.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
02075197.0 17 January 2002 (17.01.2002) EP

(71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL];
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BREKELMANS, Johannes, H., A.** [NL/NL]; Prof. Holstlaan 6, NL-5656

AA Eindhoven (NL). **KAHLMAN, Josephus, A., H., M.** [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). **DE JONG, Gerben, W.** [NL/NL]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).


(74) Agent: **DUIJVESTIJN, Adrianus, J.**; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,

[Continued on next page]

(54) Title: AN IMPROVED DIFFERENTIAL INVERTER

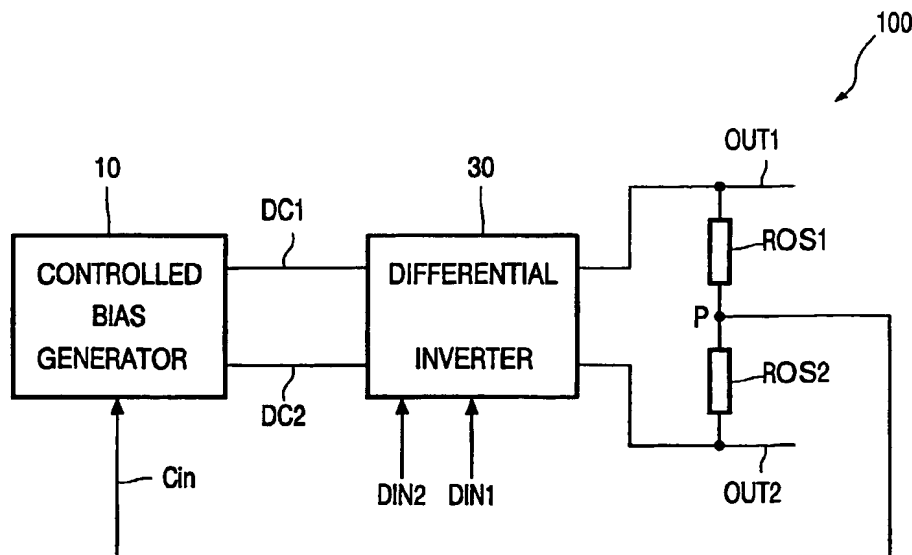

(57) Abstract: An improved differential inverter comprising a differential inverter having a differential input for receiving a first input signal and a second input signal, said inverter further comprising a differential control input for receiving a first control signal and a second control signal. The improved differential inverter further comprises a differential output for transmitting a first output signal and a second output signal. The improved differential inverter further comprises a controlled bias generator that generates the second vector of input signals in response to a bias control signal. The control bias signal is generated at an output of a voltage divider coupled to the differential output of the differential inverter said bias control signal being indicative for a DC voltage of the of the differential output.



ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SI, SK,
TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *without international search report and to be republished
upon receipt of that report*